

**ASTRAL'S WIDE RANGE  
OF ADHESIVES,  
FOR ALL YOUR NEEDS.**



# BOND/TITE®

TWO PART EPOXY ADHESIVE

## સૌથી અડવાન્સ્ડ ઇપોક્સિ એડહેસિવ્સની શ્રેણી



પ્રો

4 કલાકવાળો  
ઇપોક્સિ એડહેસિવ

ફાસ્ટ ઍન્ડ  
ક્લિઅર

5 મિનિટવાળો  
ઇપોક્સિ એડહેસિવ



7 ગણું વધુ  
ઇમ્પેક્ટ  
રેઝિસ્ટન્સ\*



માત્ર 4 કલાકમાં  
હોલ્ડિંગ સ્ટ્રેન્થ  
મેળવે



દરેક પ્રકારના  
વાતાવરણમાં  
અસરકારક



20%  
વધુ કવરેજ\*



સ્પષ્ટ અને  
પારદર્શક બોન્ડ



બોર્ડરિંગ અને વર્ટિકલ  
સપાટી માટે આદર્શ



ઉનાળો હોય કે  
શિયાળો, સમાન  
ક્યુઅરિંગ સમય




વધુ ચીકાશ ધરાવતું  
અને ઝડપથી  
સેટ થઈ જતું

# INTRODUCING

# SOLVOBOND™

## HIGH QUALITY SOLVENT CEMENTS

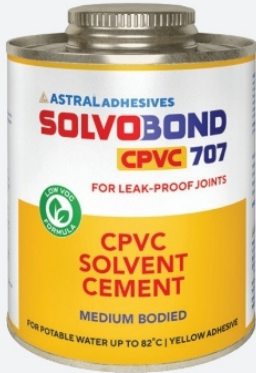

**SOLVOBOND  
CPVC 707**

**FEATURES:**

- Confirms to ASTM F-493 standard
- Burst Pressure Standard: 400 PSI, Actual: >1000 PSI
- Better Viscosity: 600-1000 CPS
- High Temperature Resistance
- Low VOC

**APPLICATIONS:**

- CPVC pipes and fitting joints where High-pressure resistance is required like, high rise buildings and Bungalows

**PRICING:**

SKU	RP	MRP
50ml	71.2	150
118ml	96	210
237ml	173.7	350
473ml	332.2	700
946ml	589.8	1100

**MARGIN:**

- High retailer margin - 70%+ on retail landing

**FEATURES:**

- Confirms to ASTM 2564 standard
- Burst Pressure Standard: 400 PSI, Actual: >700 PSI
- Better Viscosity: 500-800 CPS
- Low VOC

**APPLICATIONS:**

- uPVC pipes and fitting joints where High-pressure resistance is required like, high rise buildings and Bungalows

**PRICING:**

SKU	RP	MRP
50ml	46.6	90.0
118ml	74.6	140.0
237ml	114.4	250.0
473ml	220.3	450.0
946ml	417.8	750.0

**MARGIN:**

- High retailer margin - 60%+ on retail landing



**SOLVOBOND  
uPVC 606**



**SOLVOBOND  
PVC 501**

**FEATURES:**

- Confirms to ASTM 2564 standard
- Burst Pressure Standard: 400 PSI, Actual: >700 PSI
- High Coverage & Cost-Effective
- Low VOC

**APPLICATIONS:**

- PVC pipes and fitting joints for Sewerage and drainage, Borewell pipe fittings, Joining Electrical conduits

**PRICING:**

SKU	RP	MRP
50ml	27.1	50.0
118ml	39.8	80.0
237ml	64.4	140.0
473ml	121.2	240.0
946ml	214.5	400.0

**MARGIN:**

- High retailer margin - 65%+ on retail landing

# રસોડા અને બાથરૂમની તિરાડો માટે એક એક્સપર્ટ સીલન્ટ





પરંપરાગત પદ્ધતિઓથી  
તિરાડો ભરવી

બાથમેટથી તિરાડો ભરવી



પ્રસ્તુત છે



-  કોઈ તિરાડ નહીં
-  કોઈ ફંગસ નહીં
-  સ્મૂથ ફિનિશ અને લોન્ગ-લાસ્ટિંગ
-  રેડી-ટુ-ચુઝ - મિક્સ કરવાની જરૂર નહીં

# EPOXY ADHESIVES



## BOND TITE FEROL

Multi-purpose high strength two part epoxy adhesive system with longer potlife

- **Usage:** Used in various fields like automobile, construction etc. and bonds variety of materials of general use like metal, ceramic, marble, glass etc.
- **Pot life:** 70 - 90 minutes • **Hardening time:** 8 - 10 hours
- **Packing:** 3 gm, 13 gm, 36 gm, 60 gm, 90 gm, 180 gm, 270 gm, 450 gm set, 900 gm set, 1.8 kg set & 9 kg set

## BOND TITE SUPER STRENGTH

High strength two component epoxy adhesive system

- **Usage:** For extremely high bond strength in various similar and dissimilar materials such as metal, ceramic, wood, leather, rubber, marble, glass etc.
- **Pot life:** 60 - 80 minutes • **Hardening time:** 8 - 10 hours
- **Packing:** 3 gm, 7 gm, 13 gm, 36 gm, 60 gm, 90 gm, 180 gm, 270 gm, 450 gm set, 900 gm set, 1.8 kg set & 9 kg set



## BOND TITE FAST & CLEAR

"5 minutes" high strength two component transparent epoxy adhesive system

- **Usage:** Used as an adhesive for a wide range of substrates like metal, ceramic, wood, leather, rubber, marble, glass etc.
- **Pot life:** 5 minutes • **Hardening time:** 1 - 2 hours
- **Packing:** 3 gm, 6 gm, 13 gm, 36 gm, 60 gm, 90 gm, 180 gm, 270 gm, 500 gm set, 1 kg set & 2 kg set

## BOND TITE UNIWELD

High strength two component acrylic based high technology adhesive system with excellent impact strength

- **Usage:** Various similar and dissimilar substrates such as metals, rigid plastics (ABS, PVC, PU, Polycarbonate), FRP, ferrite, ceramic, wood, leather, rubber, marble, glass etc.
- **Pot life:** 3 - 5 minutes • **Hardening time:** 1 - 2 hours
- **Packing:** 3 gm, 7 gm, 12 gm, 36 gm, 60 gm, 90 gm, 180 gm, 270 gm, 500 gm set & 2 kg set



## BOND TITE RAPID

Fast setting two part opaque adhesive system for general purpose application

- **Usage:** Used at those places where instant strength is required
- **Pot life:** 9 - 13 minutes • **Hardening time:** 3 - 5 hours
- **Packing:** 3 gm, 10 gm, 35 gm, 87.5 gm, 175 gm & 1.75 kg set

# POLYESTER PUTTY & WAXES



## FILL X AUTO

Two component easy to sand polyester based putty

- **Usage:** For car patch, bus body and other automobile repair
- **Curing time:** 2 -5 minutes • **Sanding time:** 20 - 30 minutes
- **Packing:** 500 gm & 1 Kg

## RESIWAX

Wax based polish for wood, marble & metal surface

- **Usage:** Excellent polish for wood & metal surface
- **Packing:** 200 gm, 400 gm, 1 kg, 2 kg, 4 kg, & 20 kg



# TAPES



## RESITAPE PAPER TAPE

A general-purpose pressure-sensitive tape made of a thin and easy-to-tear paper, and an easily released pressure-sensitive adhesive

- **Usage:** Used in furniture for mica pasting & for painting applications
- **Packing:** 18 mm x 20 mtr, 18 mm x 40 mtr, 24 mm x 20 mtr, 24 mm x 30 mtr & 24 mm x 40 mtr

## RESITAPE PVC TAPE

PVC electrical insulation tape


- **Usage:** Widely used as an electrical insulation, color-coding in cable & wire jointing, wiring, harness, etc. This is having fire retardant quality so immediately extinguishes the fire before its propagation
- **Packing:** 18 mm x 6 mtr (Available in Black, Red, Green, Yellow & Blue colors)



## RESITAPE PTFE TAPE

A polytetrafluoroethylene (PTFE) tape

- **Usage:** Used in sealing pipe threads, in water system, centre heating system & air compression system
- **Packing:** 5 mtr, 10 mtr & 20 mtr

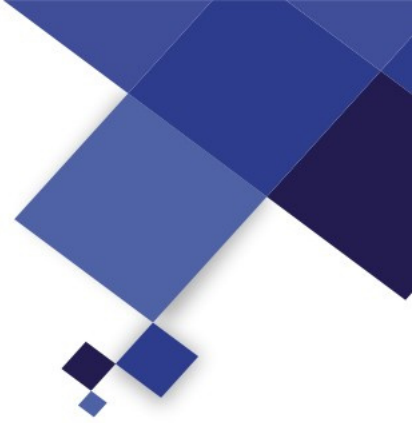

## BOND TITE METALLIC

Metal filled, fast setting two component epoxy based system

- **Usage:** Metal surface repair applications
- **Pot life:** 3 - 6 minutes • **Hardening time:** 3 - 5 hours
- **Packing:** 12 gm, 36 gm & 90 gm

## BOND TITE WHITE PASTE

Two part white color filled epoxy system specially developed for marble bonding

- **Usage:** For white marble bonding. Required shade can be achieved by adding colors in the same
- **Pot life:** 60 - 80 minutes • **Hardening time:** 8 - 10 hours
- **Packing:** 50 gm, 320 gm, 2 kg set & 10 kg set



## EPOXY PUTTY



## BOND SET FAST SETTING

Hand kneadable two part epoxy putty to repair multiple surfaces faster

- **Usage:** Various sealing requirements in electrical, mechanical, civil and allied engineering fields and in domestic applications
- **Working time:** 10 - 13 minutes • **Setting time:** 18 - 25 minutes
- **Packing:** 12 gm, 25 gm, 65 gm, 90 gm, 250 gm, 1 kg & 4 kg

## BOND SET SANITARY UNDERWATER

Hand kneadable two part epoxy putty for fast repairing of damp, wet areas and underwater substrate


- **Usage:** Sealing & repairing of any type of pipe line, tanks etc. Repairing of ceramic tile joints
- **Working time:** 8 - 10 minutes • **Setting time:** 15 - 18 minutes
- **Packing:** 12 gm, 30 gm & 65 gm



## BOND SET WHITE

White color kneadable two component epoxy putty

- **Usage:** Various requirements in handicraft, electrical, mechanical, civil and allied engineering fields and in domestic applications
- **Working time:** 10 - 13 minutes • **Setting time:** 18 - 25 minutes
- **Packing:** 25 gm, 65 gm, 90 gm, 250 gm & 1 kg

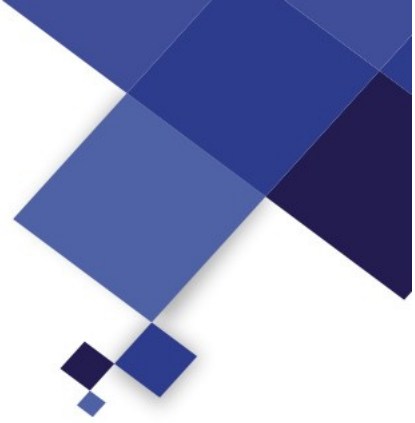

### RESIBOND AUTO-4010

Acetic cure silicone sealant for bonding and sealing

- **Usage:** For general sealing and glazing applications in automobile industry
- **Skinning time:** 4 - 9 minutes • **Curing rate:** 1 - 2 hrs/mm
- **Packing:** 300 ml Cartridge (Black)

### RESIBOND WP-5010

One part neutral cure high quality, elastic single component weather proof silicone sealant

- **Usage:** For weather proofing application like gap filling of perimeter joints of window frame & precast concrete and having excellent adhesion on most of the common construction material
- **Skinning time:** 7 - 15 minutes • **Curing rate:** 1 - 3 hrs/mm
- **Packing:** 300 ml Cartridge & 600 ml Sausage (Black & Grey)



### RESIBOND HT-7010

Red color one part oxime cure silicone sealant for high temperature applications

- **Usage:** For oil resistant, high temperature and heavy duty applications
- **Skinning time:** 7 - 15 minutes • **Curing rate:** 2 - 4 hrs/mm
- **Packing:** 300 ml Cartridge (Red)

### RESIBOND SL

One part neutral cure silicone sealant for various general purpose applications

- **Usage:** For making and sealing of all types of gaskets in automobile applications
- **Skinning time:** 7 - 15 minutes • **Curing rate:** 2 - 4 hrs/mm
- **Variants & Packing:** CLEAR: 4 gm, 10 gm, 15 gm, 20 gm, 25 gm, 50 gm, 85 gm, & 100 gm | WHITE: 20 gm & 50 gm | BLACK: 20 gm & 50 gm | GREY: 10 gm, 20 gm & 85 gm




### RESIBOND RED SL

One part neutral cure red silicone sealant for high temperature applications

- **Usage:** For making and sealing of all types of gaskets used in engine. Also replaces paper, cork, silicone & rubber gasket
- **Skinning time:** 7 - 15 minutes • **Curing rate:** 2 - 4 hrs/mm
- **Packing:** 4 gm, 10 gm, 15 gm, 20 gm, 25 gm, 35 gm, 50 gm, 85 gm & 100 gm



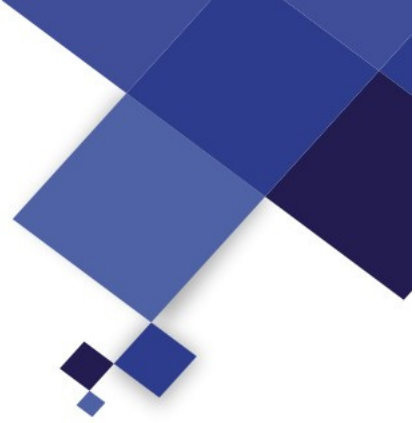

### BONDSET AUTO

Metal filled hand kneadable, non-rust, metal reinforced epoxy putty

- **Usage:** Mixes in one minute to provide fast repairs to metal surfaces like iron pipes, water tanks, tools & equipments
- **Working time:** 4 - 7 minutes • **Setting time:** 9 - 12 minutes
- **Packing:** 12 gm & 25 gm

## SILICONE SEALANTS



### RESIBOND GP-100

General purpose, cost effective one part acetoxy silicone sealant for many applications

- **Usage:** Suitable for general purpose sealing & bonding applications
- **Skinning time:** 4 - 8 minutes • **Curing rate:** 1 - 2 hrs/mm
- **Packing:** 260 ml Cartridge (Clear, Black & White)

### RESIBOND PREMIUM-1010

Premium grade one part acetoxy silicone sealant

- **Usage:** For bonding & sealing of glass, windows, doors, aluminium, ceramic, fiber glass & non-oily wood
- **Skinning time:** 4 - 9 minutes • **Curing rate:** 1 - 2 hrs/mm
- **Packing:** 280 ml Cartridge (Clear, Black & White)



### RESIBOND GL-2010

Fast drying, high performance, acetic cure silicone sealant

- **Usage:** Specially for glazing applications & aquarium building
- **Skinning time:** 4 - 9 minutes • **Curing rate:** 1 - 2 hrs/mm
- **Packing:** 300 ml Cartridge (Clear)

### RESIBOND MP-3010

High quality multi-purpose neutral cure silicone sealant

- **Usage:** Suitable for use in interior & exterior sealing in masonry related applications
- **Skinning time:** 7 - 15 minutes • **Curing rate:** 2 - 4 hrs/mm
- **Packing:** 280 ml Cartridge (Clear, Black, White, Grey & Metallic)



# PROFESSIONAL SEALANTS



## RESIPRO HIGH STRENGTH HYBRID SEALANT

High quality, elastic single component joint sealant based on hybrid polymer

- **Usage:** Ideal for large gap filling between GRC panels & for removing undulations of concrete surfaces
- **Skinning time:** 5 - 15 minutes • **Curing rate:** 1 - 3 hrs/mm
- **Packing:** 400 gm (Black & White)

## RESIPRO NAIL SAVER INSTANT GRAB SEALANT

SBS based instant grab adhesive for bonding marble, metal, wood, glass etc.

- **Usage:** It is easy to apply, non-slump, paintable and gives strong bonds to variety of materials. Suitable for Interior and exterior use. A truly multi-purpose building adhesive that can replace mechanical fixings in a variety of DIY applications.
- **Skinning time:** 20 - 30 seconds • **Curing rate:** 1 - 3 hrs/mm
- **Packing:** 290 ml (Beige)



## RESIPRO PU SEALANT

One part polyurethane sealant with high elasticity and excellent adhesion

- **Usage:** For bus body construction & for pasting windscreen in automobiles
- **Skinning time:** 5 -10 minutes • **Curing rate:** 1 - 3 hrs/mm
- **Packing:** 310 ml Cartridge (Black), 600 ml Sausage (Black & White)

## RESIPRO ACRYLIC SEALANT

Ready to use, one component acrylic sealant for fixing ceramic tiles, wooden, moulding etc.

- **Usage:** For use with glass, gypsum wall boards, cured cement, plaster & timber boards
- **Skinning time:** 5 -15 minutes • **Curing rate:** 1 - 3 hrs/mm
- **Packing:** 300 ml (White)



# ANAEROBIC ADHESIVES



## RESIMET THREAD LOCKER

Single component anaerobic thread locking adhesive

- **Usage:** To provide high strength to fasteners with assemblies and allow fasteners to withstand vibrations, resist shock and impact loads
- **Medium Strength - 922** • **Curing time:** 5 -10 minutes • **Thread size** up to M36
- **High Strength - 944** • **Curing time:** 5 -10 minutes • **Thread size** up to M25
- **Packing:** 5 ml, 50 ml & 250 ml

# APPLICATOR TOOLS




## GUN FOR 300 ML CARTRIDGE

Heavy duty high quality applicator gun for use with cartridge products

## GUN FOR 600 ML SAUSAGE

Heavy duty high quality applicator gun for use with sausages products

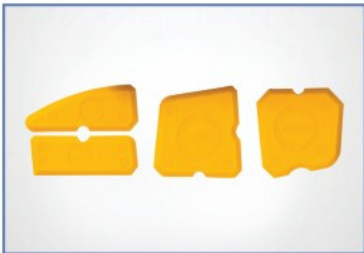

## SILICONE APPLICATOR

To apply sealants flawlessly and for perfect finish

Usage: Use at any edge, any corner, any joint, for hassle free professional finish



## RESIMET BEARING RETAINER

Single component, fast curing anaerobic high strength adhesive for cylindrical filling

- **Usage:** For assembling of bearing to casing. Based on application, various grades are available.

**Medium Strength - 822 • Curing time:** 5 -10 minutes • **Gap filling:** 0.15 mm

**High Strength - 844 • Curing time:** 5 -10 minutes • **Gap filling:** 0.25 mm

- **Packing:** 5 ml, 50 ml & 250 ml

## CYANOACRYLATE



### RESIQUICK 0.5 gm

Low viscosity cyanoacrylate for any general purpose application

- **Usage:** Applied on horizontal and less porous substrate surfaces
- **Setting time:** 2 - 4 seconds\*
- **Packing:** 0.5 gm

### RESIQUICK PROFESSIONAL

Fast cure cyanoacrylate for multiple substrate bonding

- **Usage:** For porous & non-porous substrates like metal, wood, plastic, rubber etc.
- **Setting time:** 2 - 4 seconds\*
- **Packing:** 1 gm, 2 gm, 3 gm, 5 gm & 15 gm



### RESIQUICK NON-DRIP

Non-drip, thick cyanoacrylate for precise application

- **Usage:** For porous substrates like wood, leather, PVC edge banding
- **Setting time:** 6 - 8 seconds\*
- **Packing:** 1 gm, 3 gm & 10 gm

### RESIQUICK GEL

High viscous thixotropic gel cyanoacrylate

- **Usage:** Excellent for vertical bonding applications like MDF board, acrylic plastic etc.
- **Setting time:** 8 - 10 seconds\*
- **Packing:** 20 gm



\*Curing speed may vary for different substrates & thickness of adhesive applied.



## HEXON

Single component rubber based contact adhesive

- **Usage:** For bonding glass, ceramic, canvas board, leather etc. to similar surfaces
- **Packing:** 11 ml, 30 ml & 90 ml

## BONDFIX-XR

Air drying single component low strength adhesive for fixing beads over fabric

- **Usage:** For bonding as well as clear coating applications
- **Packing:** 10 gm & 35 gm



## ASTRAL ADHESIVES FABRIC GLUE

Milk color air drying gel which becomes transparent and remains flexible after application

- **Usage:** It replaces stitching at several places in fancy garment manufacturing such as sticking beads, sequins, lace ribbon, applique, foil, mirror work, glitter dust, cords & seams to fabric applications
- **Packing:** 30 gm, 50 gm & 80 gm

## RESIGRIP XR

Liquid gasket for making gasket for metal surface

- **Usage:** For sealing small gaps in the metal joint, engine casing etc., it is resistant to engine oil, heat, pressure, vibrations & impact
- **Packing:** 10 gm, 20 gm & 50 gm



## GASKETBOND

Fast drying, flexible setting sealing compound

- **Usage:** For sealing gap between gasket and metal surfaces to make the joint leak-proof, it has excellent gap filling tendency and can withstand upto 120°C
- **Packing:** 5 gm, 13 gm, 25 gm, 30 gm & 50 gm



### VETRA LV

General purpose low viscous industrial cyanoacrylate for bonding multiple substrate

- **Usage:** For bonding non-porous substrate like plastic, rubber metal etc. and for assemblies with very close fitting parts
- **Setting time:** 2 - 4 seconds\*
- **Packing:** 10 gm, 20 gm, 30 gm & 50 gm

### VETRA MV

Medium viscous industrial cyanoacrylate for multiple applications

- **Usage:** For bonding non-porous substrates like metal, plastic, ceramic & porous substrates like wood and leather etc.
- **Setting time:** 2 - 4 seconds\*
- **Packing:** 20 gm



### VEGAQUICK

Low viscosity general purpose cyanoacrylate

- **Usage:** For flex board industries, for bonding flex to metal & other substrates
- **Setting time:** 2 - 4 seconds\*
- **Packing:** 10 gm, 15 gm, 20 gm, 30 gm & 50 gm

## SOLVENT CEMENTS



### WELD-ON 500 CTS

CPVC solvent cement

- **Usage:** For joining CPVC & UPVC pipes & fittings
- **Packing:** Tube - 20 ml, 50 ml, Metal Container - 50 ml, 100 ml, 500 ml, 1 ltr

### WELD-ON 705 PVC

PVC solvent cement

- **Usage:** For joining PVC pipes & fittings
- **Packing:** Tube - 20 ml, 50 ml, Metal Container - 50 ml, 100 ml, 500 ml, 1 ltr





## SOLVOBOND

Solvobond is a high quality PVC solvent cement

- **Usage:** For repairing and bonding of PVC pipes & components made from PVC like PVC toys, PVC floor tiles, PVC doors etc.
- **Packing:** **Tube** - 5 ml, 10 ml, 11 ml, 25 ml, 30 ml, 50 ml, 70 ml & 90 ml  
**Metal Container** - 50 ml, 100 ml, 200 ml, 500 ml & 1 Ltr  
**Plastic Container** - 200 ml, 250 ml, 500 ml & 1 Ltr

## PLASTIWELD

Low viscosity fast drying transparent solvent cement

- **Usage:** For joining of PVC pipes and fittings, can be used for potable water
- **Packing:** 50 ml, 100 ml 200 ml, 500 ml & 1 Ltr



## AMROW

Regular bodied fast setting solvent cement for UPVC pipes & fittings

- **Usage:** For joining UPVC pipes to UPVC socket, can be used for potable water
- **Packing:** **Tube** - 5 ml, 10 ml, 20 ml & 50 ml  
**Metal Container** - 50 ml, 100 ml, 200 ml, 500 ml & 1 Ltr

## TRUZO

Medium bodied yellow color CPVC solvent cement

- **Usage:** For joining CPVC pipes and fittings. It can be used for potable water, pressure pipe, gas and conduit, vent and drain waste pipe. Can withstand upto 82° C
- **Packing:** **Tube** - 5 ml, 15 ml, 25 ml & 50 ml. **Metal Container** - 50 ml, 100 ml, 200 ml & 500 ml



# GLUES & ADHESIVES



## BONDFIT WHITE

Single component metal pipe joint sealing compound

- **Usage:** White color all purpose thread sealing compound with which leak-proof sealing can be done on threaded connections
- **Packing:** 25 gm, 50 gm, 100 gm, 200 gm, 500 gm & 1 kg



---

**Registered Office:** 207/1, Astral House, B/h. Rajpath Club, Off. S.G. Highway, Ahmedabad – 380 059.  
**Corporate Office:** 9 'A' Floor, 9-Krishna Tower, 15/63, Civil Lines, Kanpur-208001 U.P., India.  
Tel.: +91 512 6670400, 2331646 | E-mail: [customercare@resinova.com](mailto:customercare@resinova.com) | Website: [www.astraladhesives.com](http://www.astraladhesives.com)